

# ES2632M

MICRO-SIZED ELECTRIC SCISSOR LIFT

SCISSOR LIFT



## KEY SPECS

### Max Platform Height

25-ft 6-in / 7.77-m

### Platform Capacity

600 lb / 272-kg

### Number of Occupants

Indoor: 2\*  
Outdoor: 1

### Stowed Drive Speed

3.0 mph / 4.8 km/h

## KEY FEATURES

- Access tight spaces while experiencing exceptional maneuverability featuring a zero turn radius, compact footprint.
- Protect delicate work surfaces with the standard leak containment system consisting of custom-fit trays to capture potential leaks.
- Maximize productivity and uptime with onboard technology exclusive to JLG including Variable Tilt, Progressive Elevated Drive and ClearSky Smart Fleet.
- Optimize versatility with the ability to configure the machine with an integrated mid-rail deck, offering an additional 19.5-in height in the platform.

## ACCESSORIES & OPTIONS

- 900W Inverter
- Additional Single Amber Beacon
- Anti-Vandalism Package
- Batteries, 4 X 6V 220 amp-hr AGM
- Batteries, Lithium Ion
- Coiled Platform Control Box Cable
- Hostile Environment Package
- Integrated Mid-Rail Deck (Additional 19.5-in Height)
- MDI (Ground)
- SkySense® Enhanced Detection System
- Special Hydraulic Fluids
- White Noise Alarm

\*When optional integrated mid-rail deck is in use, only one occupant.

## STANDARD SPECIFICATIONS

| Performance                     | Indoor                                  | Outdoor                                 |
|---------------------------------|-----------------------------------------|-----------------------------------------|
| Platform Height (Elevated)      | 25-ft 6-in / 7.77-m                     | 18-ft / 5.49-m                          |
| Platform Capacity               | 600 lb / 272-kg                         | 600 lb / 272-kg                         |
| Capacity on Platform Extension* | 265-lb / 120-kg                         | 265-lb / 120-kg                         |
| Number of Occupants             | 2                                       | 1                                       |
| Lift / Lower Time (No Load)     | 25-35 Seconds                           | 25-35 Seconds                           |
| Lift / Lower Time (Rated Load)  | 26-34 Seconds                           | 26-34 Seconds                           |
| Maximum Drive Height            | Fully Elevated                          | Fully Elevated                          |
| Weight*                         | 4,611-lb / 2,092-kg                     | 4,611-lb / 2,092-kg                     |
| Max. Ground Bearing Pressure    | 192 psi / 13.5 kg/cm2                   | 192 psi / 13.5 kg/cm2                   |
| Drive Speed (Lowered)           | 3.0 mph / 4.8 km/h                      | 3.0 mph / 4.8 km/h                      |
| Drive Speed (Elevated Range**)  | 0.5 mph / 0.8 km/h - 1.5 mph / 2.4 km/h | 0.5 mph / 0.8 km/h - 1.5 mph / 2.4 km/h |
| Max Gradeability                | 24%                                     | 24%                                     |
| Max Tilt Rating (Side-to-Side)  | 1.5 Degrees                             | 1.5 Degrees                             |
| Max Tilt Rating (Fore and Aft)  | 3.0 Degrees                             | 3.0 Degrees                             |
| Turning Radius (Inside)         | Zero                                    | Zero                                    |
| Turning Radius (Outside)        | 66-in / 1.68-m                          | 66-in / 1.68-m                          |

Certain options or country standards increase weight.

\*Standard Machine Without Integrated Mid-Rail Deck.

\*\*Progressive Elevated Drive Speed

## Power

|           |                |
|-----------|----------------|
| Batteries | 4 X 6V 220 Amp |
| Charger   | 650W Delta Q   |
| Drive     | 24V AC         |

## Tires

|          |                                     |
|----------|-------------------------------------|
| Standard | 12.7 in / 323 x 100-mm, Non-Marking |
|----------|-------------------------------------|

## Brakes

Electric, friction

## Hydraulic System

|          |                         |
|----------|-------------------------|
| Capacity | 1.3 gal / 5 L           |
| Pump     | Fixed Displacement Gear |

## STANDARD FEATURES

- 27 amp Multi-Function Universal Charger
- 110V AC Receptacle in Platform
- Active Pothole Protection System
- All Motion Alarm
- Analyzer Port for Diagnostics
- Battery Condition Indicator
- CAN-Enabled Charger
- ClearSky Smart Fleet™ Hardware (CS550)
- Diamond Tread Steel Deck
- Drive Motor Covers
- Electric Drive
- Foot-Actuated Deck Extension
- Fork Lift Pockets
- Greaseless Kingpin Joints
- Horn
- Hourmeter
- Lanyard Attach Points
- Leak Containment System
- LED Motion/Amber Beacon (CS550)
- Lifting and Tie Down Points
- Load Sensing System
- Lubrication Free Scissor Arm Bushings
- Manual Descent Cable
- Movable, Removable Platform Control Box
- Nickel Plated Pins
- Progressive Elevated Drive
- Proportional Controls
- Quick Fold Rails
- Removable Ladder
- Scissor Maintenance Prop
- Self-Closing Gate
- Steel Swing-Out Doors
- Tilt Alarm and Light
- USB Charger & Phone Holder
- Variable Tilt Visual Zone Indicator

# ES2632M


MICRO-SIZED ELECTRIC SCISSOR LIFT

SCISSOR LIFT



## DIMENSIONS

All dimensions are approximate

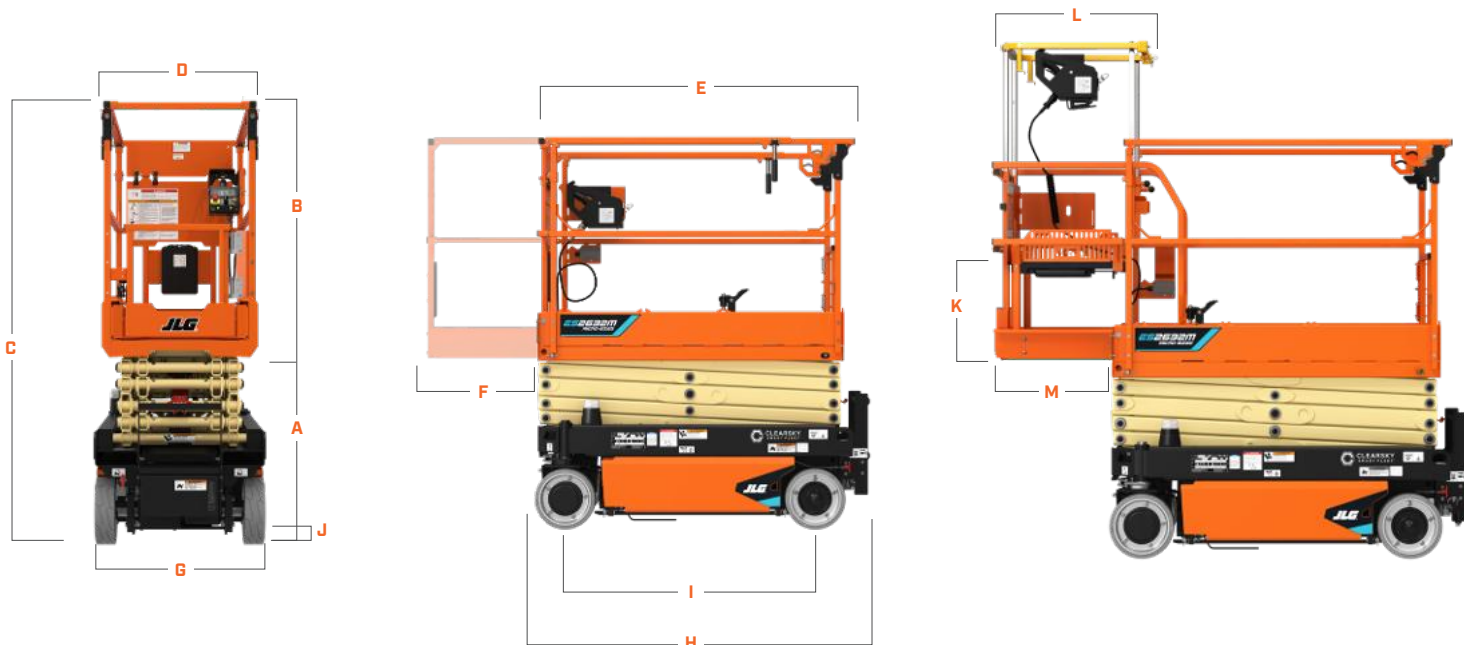

|                                         |                  |
|-----------------------------------------|------------------|
| <b>A.</b> Platform Height (Lowered)     | 38.7-in / 98-cm  |
| <b>B.</b> Platform Railing Height       | 43.3-in / 1.10-m |
| <b>C.</b> Machine Height (Rails Raised) | 83.1-in / 2.11-m |
| <b>D.</b> Platform Width*               | 29.1-in / 74-cm  |
| <b>E.</b> Platform Length*              | 65.5-in / 166-cm |
| <b>F.</b> Platform Extension            | 33.7-in / 86-cm  |

|                            |                  |
|----------------------------|------------------|
| <b>G.</b> Machine Width    | 32-in / 81-cm    |
| <b>H.</b> Machine Length   | 71.8-in / 1.82-m |
| <b>I.</b> Wheelbase        | 53-in / 1.34-m   |
| <b>J.</b> Ground Clearance | 2.8-in / 7-cm    |

### OPTIONAL: Integrated Mid-Rail Deck

|                                                       |                        |
|-------------------------------------------------------|------------------------|
| <b>K.</b> Integrated Mid-Rail Deck Height             | 19.5-in / 50-cm        |
| <b>L.</b> Integrated Mid-Rail Deck Platform           | 22 x 23-in/ 56 x 58-cm |
| <b>M.</b> Integrated Mid-Rail Deck Platform Extension | 23.7-in / 60-cm        |

\*Dimensions reflect outside measurements.



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



**JLG INDUSTRIES, INC.**  
Toll-free US 877-JLG-LIFT  
**JLG.com**

An Oshkosh Corporation Business