



TECHNICAL DATA

MASSES

Weight	21.5 t
--------	--------

DIMENSIONS

Transport length	10.62 m
Transport width	2.55 m
Transport height	3.10 m
Front ramp angle	12°
Transport length CS Stage IV	10.75 m

MATERIAL HOPPER

Dumping height (center/outside)	570 mm /650 mm
Hopper volume	6.5 m³ /13 t
Hopper Volume CS Stg.IV	7.0 m³ /14 t

TRACTION

Operating speed, max	25 m/min
Transport speed, max	4 km/h

CONVEYOR



Conveyor type	Rubber belt on two chains, mounted with metal stiffeners
Conveyor speed	Constantly variable
Conveyor width	1200 mm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



DIMENSIONS

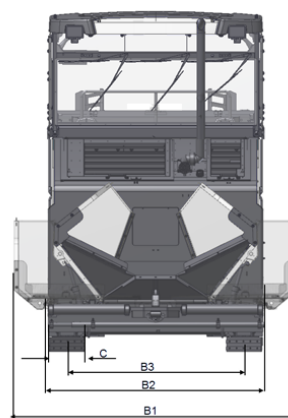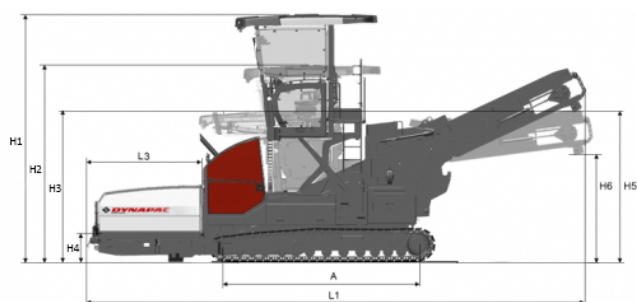

DIMENSIONS

A. Axle track	3.90 m
B1. Width, max.	3.35 m
B2. Width, standard	2.55 m
B3. Width, center of tracks	2.09 m
C1. Crawler Width	0.32 m
H1. Height, max.	5.02 m
H2. Height	4 m
H3. Height, transport	3.10 m
H4. Dumping height	570 mm
H5. Feeding height, max.	3.0 m
H6. Feeding height, min.	2.1 m
L1. Length	10.24 m
L3. Length, hopper	2.23 m

STANDARD EQUIPMENT

- Feed Manager 2
- Standard push roller
- Mechanical rock deflector
- LED working lights
- Emulsion spray system
- Chain lubrication system
- Lifting cylinder for loading and unloading the machine
- Second operator station
- Release agent spray system incl. 15m spray hose

OPTIONAL EQUIPMENT

- TruckAssist Advanced
- Multifunctional joystick integrated in seat armrest
- Light balloons LED 1x400W
- Steering control 10m / 14m
- LightAssist
- Camera System
- Material Hopper MH2500

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.