



- Normal transport width is 2.55m
- Conveyor belt lifetime up to 3000h
- Less than 10l fuel per hour
- Impressive feeding capacity
- Easy and automatic cleaning

TECHNICAL DATA

MASSES

Weight	26.0 t
--------	--------

DIMENSIONS

Transport length	9.46 m
Transport width	2.55 m
Transport height	3.10 m
Front ramp angle	12°
Lifting Up/Down	27° /27°
Swinging Left/Right	55° /55°
Transport length CS Stage IV	09.79 m
Transport length Stg.IV + SW6500	15.98 m
Transport Length with SW6500	15.23 m

MATERIAL HOPPER

Dumping height (center/outside)	570 mm /650 mm
Hopper volume	6.5 m³ /13t
Hopper Volume CS Stg.IV	7.0 m³ /14t

IMIX MX STAGE I

Mixing devices	2 Mixing augers
Auger diameter	320 mm
Drive system	Hydraulic single drives
Speed	45 -50 RPM

IMIX MX STAGE II

Mixing devices	Flow divider with 2 mixing augers
Auger diameter	380 mm
Drive system	Hydraulic single drives
Speed	79 RPM

CONVEYOR

Conveyor type	Rubber belt on two chains, mounted with metal stiffeners
Conveyor speed	Constantly variable
Conveyor width	1200 mm



Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



- Normal transport width is 2.55m
- Conveyor belt lifetime up to 3000h
- Less than 10l fuel per hour
- Impressive feeding capacity
- Easy and automatic cleaning

DIMENSIONS

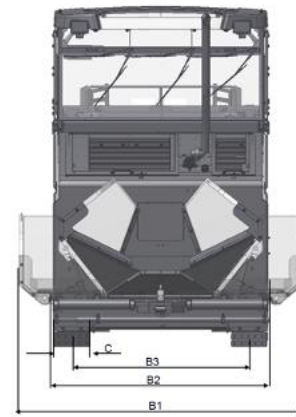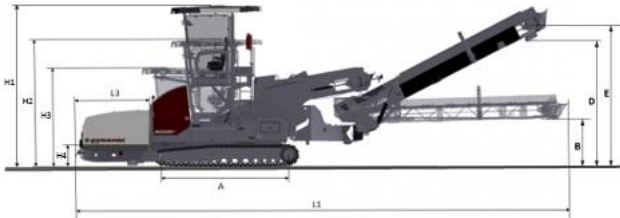

DIMENSIONS

B. Clearance, Swing conveyor (min.)	1.1 m
B1. Width, max.	3.55 m
B2. Width, standard	2.55 m
B3. Width, center of tracks	2.09 m
C1. Track width	320 mm
D. Clearance, Swing conveyor (max.)	3.7 m
E. Swing conveyor material drop height	4.15 m
H1. Height, max.	5 m
H2. Height	4 m
H3. Height, transport	3.1 m
H4. Dumping height	580 mm
L1. Length	15.3m (9.25m)
L3. Length, hopper	2.25 m

STANDARD EQUIPMENT

- Feed Manager 2
- Standard push roller
- Mechanical rock deflector
- LED working lights
- Emulsion spray system
- Chain lubrication system
- Lifting cylinder for loading and unloading the machine
- Second operator station
- Release agent spray system incl. 15m spray hose

OPTIONAL EQUIPMENT

- SW6500
- Swing Assist
- TruckAssist Advanced
- Multifunctional joystick integrated in seat armrest
- Light balloons LED 1x400W
- Steering control 10m /14m
- LightAssist

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.