



Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



Technical Data

Material Hopper

Dumping height (center/outside)	555 mm /560 mm
Hopper width, internal	3.29 m

Conveyor

Conveyor type	Dual bar feeder
Conveyor control	Automatic with limit switches
Conveyor width	2 x 655 mm

Engine

Manufacturer /Model	Cummins QSB6.7-C173
Emissions according to	EU Stage IIIA
Rated power, SAE J1995	129 kW @ 2200 rpm
Fuel tank capacity	337 l

Auger

Auger diameter	380 mm
Auger control	Automatic with ultrasonic sensors

Working Width

test	390 mm
------	--------

Dimensions

Basic width	2.55 m
Working width, minimum (with reducing shoe)	2.05 m
Working width, max.	9 m
Front ramp angle	15°


Masses

Weight	19.0 t
--------	--------

Capacity

Placement thickness (max)	310 mm
Theoretical placement capacity	700 t/h

Dimensions

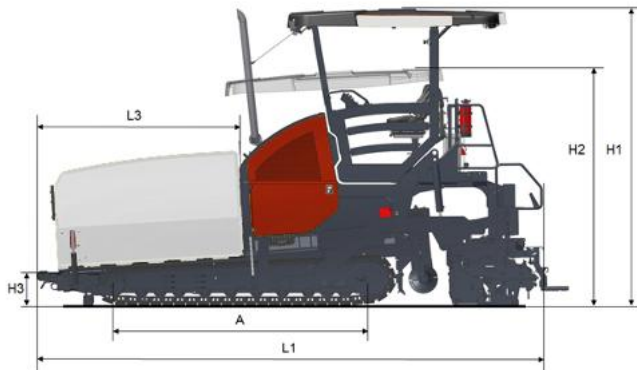

A. Axle track	2.90 m
B1. Width, max.	3.40 m
B2. Width, standard	2.55 m
B3. Width, center of tracks	1.99 m
C1. Track width	0.32 m
H1. Height, max.	3.90 m
H2. Height, transport	3.10 m
H3. Height	0.49 m
L1. Length	6.15 m
L3. Length, hopper	2.12 m


Screeds



V5100 TV / TV E / TH E



V6000 TV / TV E / TH E

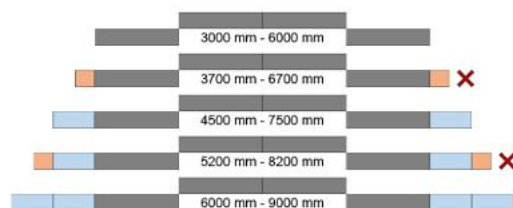

Legend

- 1275 mm V5100 section
- 1500 mm V6000 section
- 750 mm extension box
- 350 mm extension box
- X Not available for TH E screeds