V3500 TV E

Screeds

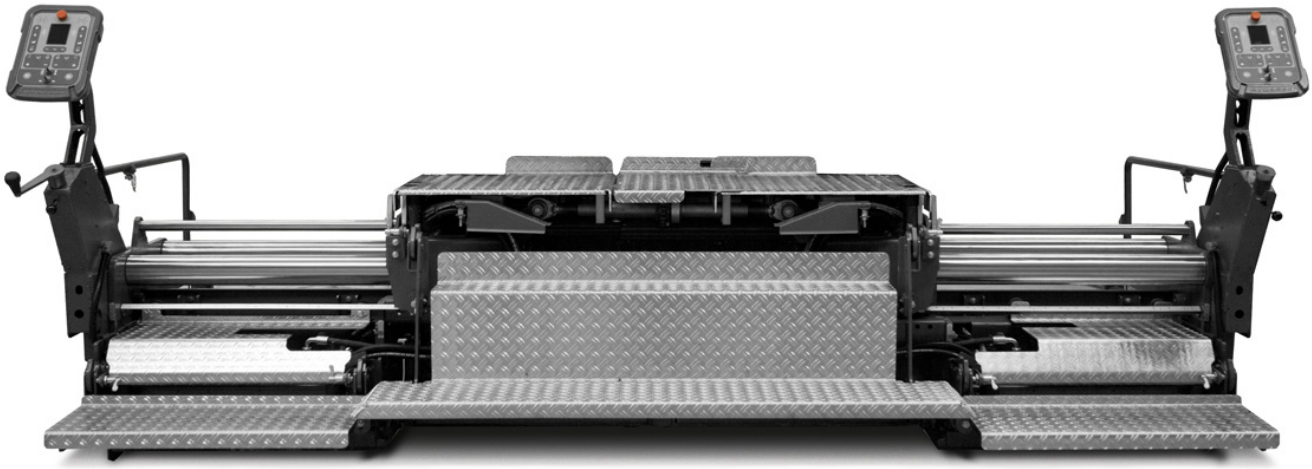

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

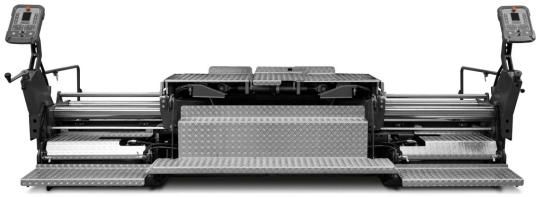

Technical Data

Dimensions

Basic width	1.75 m
Working width, minimum (with reducing shoe)	0.70 m
Working width, hydraulic extendable	3.50 m
Working width, max.	4.70 m
Bottom plates thickness	12 mm
Extension boxes	300 mm

Masses

Mass (basic width)	1620 kg
Extension boxes (300 mm)	165 kg
Side shields, x2	200 kg

Heating

Heating system	Electric
Power, basic width	8.4 kW
Power, max width	12.7 kW
Control type	Zonal

Compaction

Compacting elements	Tamper and Vibration
Crown profile	-2.5% up to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.