V5100 TH E

Screeds

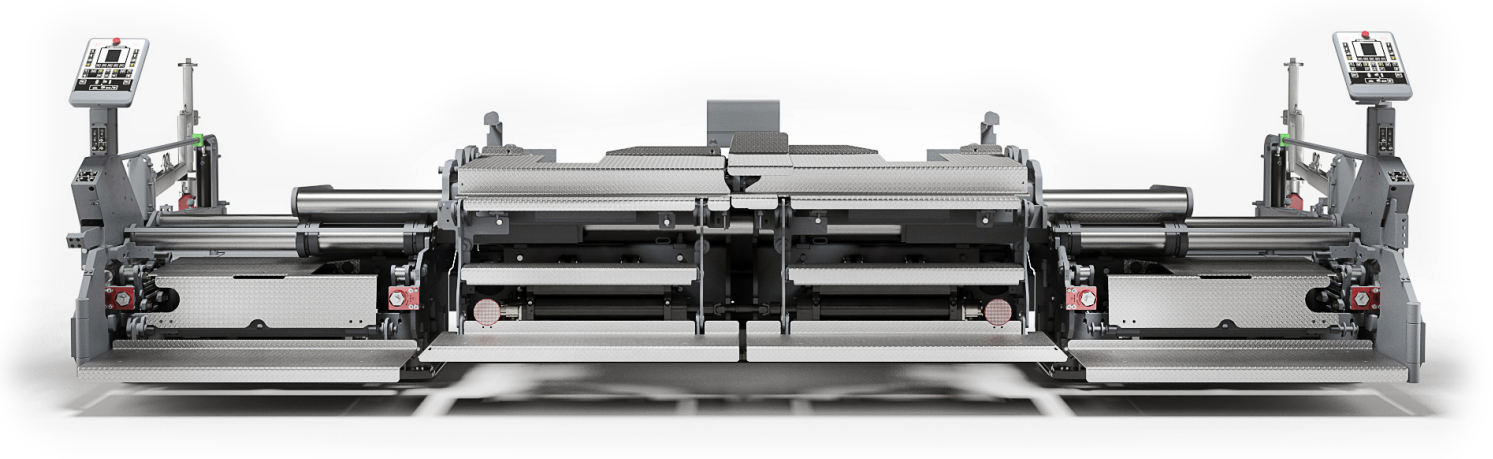

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

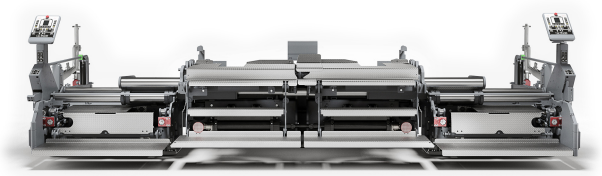

Technical Data

Dimensions

Basic width	2.55 m
Working width, max.	8.10 m
Bottom plates thickness	300 mm
Working width, hydraulic extendable	5.10 m
Working width, minimum (with reducing shoe)	2.05 m

Masses

Mass (basic width)	3800 kg

Heating

Heating system	Electrical

Compaction

Compacting elements	Vertical impact tamper /Vibration and secondary compactor
Crown profile	-2.5% to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm
High Compaction Pressure Range	8 -70 Bar

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.