
V5100 TV E

Screeds

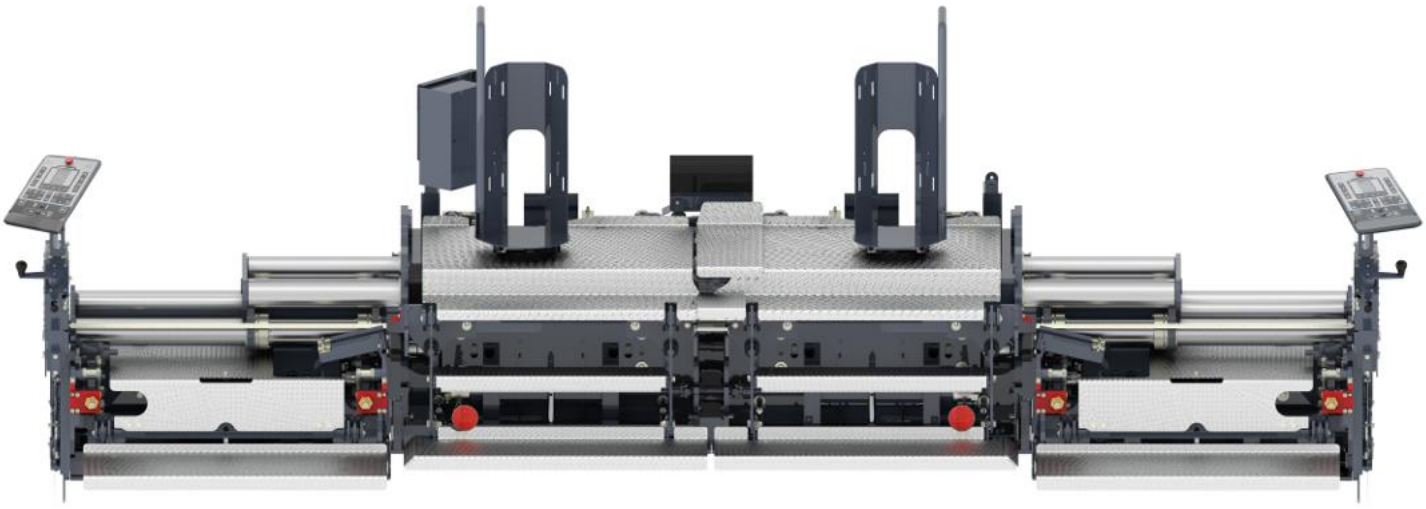

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.

Technical Data



Dimensions

Basic width	2.55 m
Working width, max.	8.80 m
Bottom plates thickness	380 mm
Working width, hydraulic extendable	5.10 m
Working width, minimum (with reducing shoe)	2.05 m

Masses

Mass (basic width)	3400 kg

Heating

Heating system	Electrical

Compaction

Compacting elements	Vertical impact tamper /Vibration
Crown profile	-2.5% up to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.The above information is a general description only, all informations are supplied without liability.